



**Prevent Security  
Systems**

# SECURITY SYSTEM COMPONENTS & ACCESSORIES

## Metal access control S601EM

**Metal structure design, anti-vandal**  
**Digital backlit keyboard**  
**All-in-one, WG26 output/input**  
**User capacity: 2000 card user card, 2000 user password**  
**Three way to open the door, card, password, card + password**  
**The doorbell button and interface: buttons and isolation circuit, connect to any external bell**



### Technical parameters:

Card type : EM

Lock output :  $\leq 3A$

Alarm output :  $\leq 20A$

Ambient temperature :  $-45^{\circ}C \sim 60^{\circ}C$

Capacity: 2,000

Working voltage :  $DC12V \pm 10\%$

Output short circuit protection time :  $\leq 100\mu S$



Door Opening Time: 0~99s(Adjustable)

Environment Humidity : 10%~90%

Static electricity :  $\leq 30mA$

Card read distance : 5~8cm

Dimension : 120 \*56\*20mm

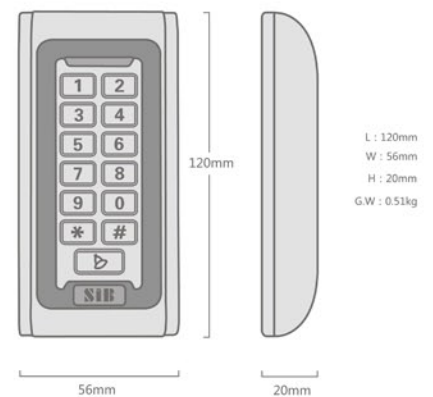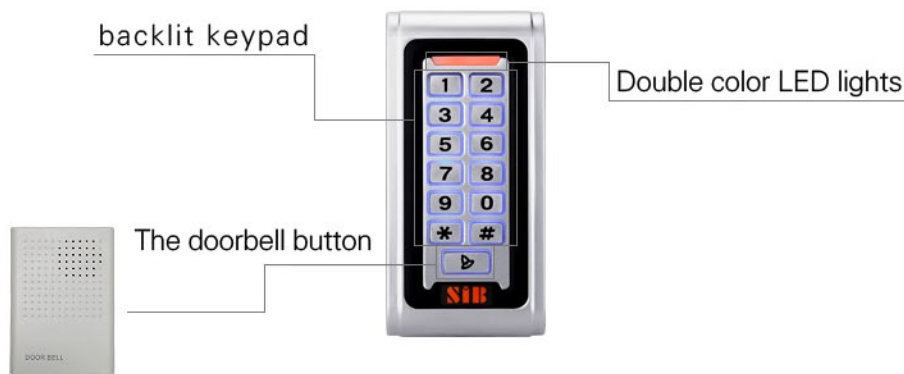

WG26 output/input



Anti  
vandal